





Anker SOLIX S2000



Power That Lasts
20% Longer

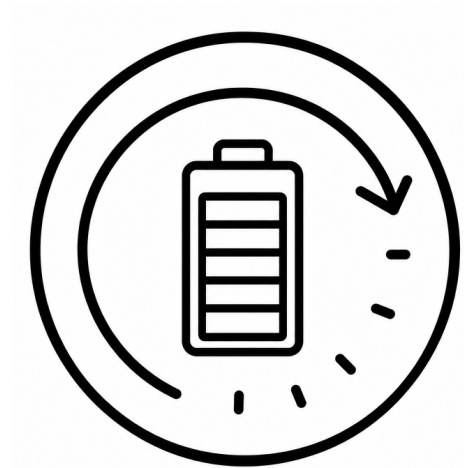

10,000 Battery Cycles,
15-Year Lifespan

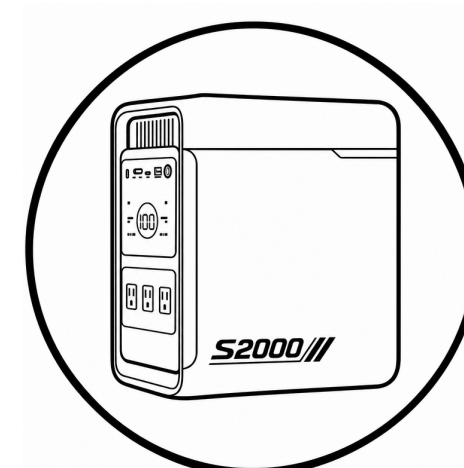

Most Compact
2kWh Ever

Email: support@ankersolix.com

Note: Product specifications and details are subject to change without notice.
Refer to the Anker SOLIX official website for current and accurate information.



LinkedIn



Website

I Anker SOLIX S2000

Capacity	6.4 Vd.c. / 314Ah, 2,000 Wh
Battery Cycles	6,000 (80%), 8,000(70%), 10,000 (60%)
AC Input Voltage	220 - 240 V ~ 5.23 A, 50 / 60 Hz
AC Input Power (Charging)	1,150 W Max
AC Input / Output Power (Bypass Mode)	2,200 W Max
AC Input Power (Ultra Fast Charging)	1,600 W Max
MPPT Input	11V-60V = 12.5A Max. (400W Max.)
AC Output Power	230 V ~ 6.52 A, 50 / 60 Hz, 1,500 W Max
AC Surge Power	3,000 W
SurgePad Power	2,600 W
AC Output Ports	4×
USB-A Output	5 V = 2.4 A (12 W Max)
USB-C 1 Output	5 V = 3 A (15 W Max)
USB-A + USB-C 1 Output	5 V = 3.6 A (18 W Max)
USB-C 2 Output	5V = 3A / 9V = 3A / 15V = 3A / 20 V = 3 A / 20 V = 5 A (100 W Max)
UPS	10 ms
Discharging Temperature	-20°C to 40°C
Charging Temperature	0°C to 40°C
Dimensions	208 × 282 × 323.3 mm
Net Weight	16.2 kg
Warranty	5 Years
What’s in the Box	Anker SOLIX S2000 AC Charging Cable Safety + Warranty Card QSG



LinkedIn



Website